

How to configure SMS authorization.

Edimax PRO. Administrator setting

Administrator choose the SMS provider and key in the username/Password



A P C 5 0 0 Dashboard Zone Plan NMS Monitor **NMS Settings** Local Network Local Settings Toolbox

- > Access Point
- > WLAN
- > RADIUS
- > Access Control
- > Guest Network
- > Users
- > Guest Portal
- > Zone Edit
- > Schedule
- > Device Monitoring
- > Firmware Upgrade
- > Advanced
 - System Security
 - Date and Time
 - > System Accounts**

Google Maps

API Key: AIZAyBTYlhPY57O1RWtOEe92tCwCgIxwygn08
(Please go to https://console.developers.google.com/flows/enableapi?apiid=maps_backend&keyType=CLIENT_SIDE&reusekey=true to apply for an API key.)

SMS

Provider	Stream Telecom
Username	Plivo
Password	
Sender Name/Phone Number	
Verification	<input type="button" value="Test Account"/>

Add a new guest portal



A P C 5 0 0 Dashboard Zone Plan NMS Monitor **NMS Settings** Local Network Local Settings Toolbox

- > Access Point
- > WLAN
- > RADIUS
- > Access Control
- > Guest Network
- > Users
- > Guest Portal**
- > Zone Edit
- > Schedule
- > Device Monitoring
- > Firmware Upgrade

Guest Portal

Search Match whole words

<input type="checkbox"/>	Name	Guest Portal Type
Please add Guest Portal setting		

Guest Portal Settings

Idle Timeout minutes

Login Password Retry Lockout (1-30 times)

Choose **dynamic users**



A P C 5 0 0 Dashboard Zone Plan NMS Monitor **NMS Settings** Local Network Local Settings Toolbox

> Access Point
> WLAN
> RADIUS
> Access Control
> Guest Network
> Users
> Guest Portal
> Zone Edit
> Schedule

Guest Portal Settings

Name	<input type="text" value="test"/>
Description	<input type="text" value="test"/>
Guest Portal Type	<input type="text" value="Free"/>
Landing Page	<input type="text" value="www.edimax.com.tw"/>

Free
Service Level Agreement
Static Users
Dynamic Users

Apply Cancel

Name	test
Description	test
Guest Portal Type	Dynamic Users
Authentication Server	Local Database
Authentication User Group	Please Select <small>Please create the first Guest Portal user group in NMS Settings->Users</small>
Landing Page	<input checked="" type="radio"/> Redirect to the original URL <input type="radio"/> Promotion URL <input type="text" value="http://"/> <input type="text" value="www.edimax.com.tw"/>

Front Desk Settings

User Group	Please Select <small>Please create the first Front Desk user group in NMS Settings->Users</small>
Generation URL	http://192.168.2.1/frontdesk.html
Printout Message	<input type="button" value="Edit"/>
SMS Notification	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
SMS Default Country Code	<input type="text" value="🇨🇦 +1"/>
SMS Message	<input type="button" value="Edit"/>

FrontDesk setting

Guest User Registration Service Settings

Guest Registration Service	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Valid Period	1 day <small>→</small>
Authentication Method	SMS
Default Country Code	<input type="text" value="🇨🇦 +1"/>
Guest Account	<input checked="" type="radio"/> Use Cell Phone Numbers as Username.
SMS Message	<input type="button" value="Edit"/>

- 1 day
- 1 hour
- 3 hours
- 6 hours
- 12 hours
- 1 day

Guest setting

Edit the SMS content

Guest User Registration Service Settings

Guest Registration Service	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Valid Period	1 day
Authentication Method	SMS
Default Country Code	+1
Guest Account	<input checked="" type="radio"/> Use Cell Phone Numbers as Username.
SMS Message	Edit



Definition Table

Symbol	Description
{SSID}	The SSID for Guest Portal user
{USERNAME}	The Name of Guest Portal user
{PASSWORD}	The Password of Guest Portal user
{PERIOD}	The valid access time of Network Service.
{EXPIRETIME}	The expire time of user account
{CREATETIME}	The create time of user account
{SN}	The Serial number of user account

* While printing the user data in Front Desk page, the "Symbol" will be replaced by the value in Users database.

Printout Content

Text with more than 160 letters may be split into different SMS messages.

Welcome! EDIMAX Technology. SSID: {SSID}, Username: {USERNAME}, Password: {PASSWORD}, Valid Period: {PERIOD}, Expire Time: {EXPIRETIME}

Guest setting

Link Guest SSID and redirect to captive portal

The screenshot displays a web browser window with the URL `192.168.0.9/captive_login.html?url=http://www.google.com&profile=1&ssid=portal_test_ssid_01&mac=00AABBCCDD30`. The page features the EDIMAX Pro logo at the top. Below the logo is a login form titled "Captive Portal Login" with the EDIMAX logo and tagline "NETWORKING PEOPLE TOGETHER". The form includes a "User Name" field containing "886987058326" and an empty "Password" field. A red box highlights the link "Register an account to access Internet" below the password field. Below this link is a red "Login" button, a "Remember Me" checkbox, and an "Accept Terms of use" checkbox. A red arrow points from the Windows taskbar at the bottom to the "Register an account to access Internet" link.

Register a new account when you are new user

Register a new account by typing in **name/cell phone number/verification code**

192.168.0.9/captive_regi x 新增分頁 x 192.168.0.9/captive_regi x

192.168.0.9/captive_register.html?url=http://www.google.com&profile=1&ssid=portal_test_ssid_01&mac=00AABCCDD30

EDIMAX Pro

EDIMAX
NETWORKING PEOPLE TOGETHER

Captive Portal Login

Name


Cell Number

bhmkri

Submit

下午 03:27
2016/3/15

Submit and will show successfully registered

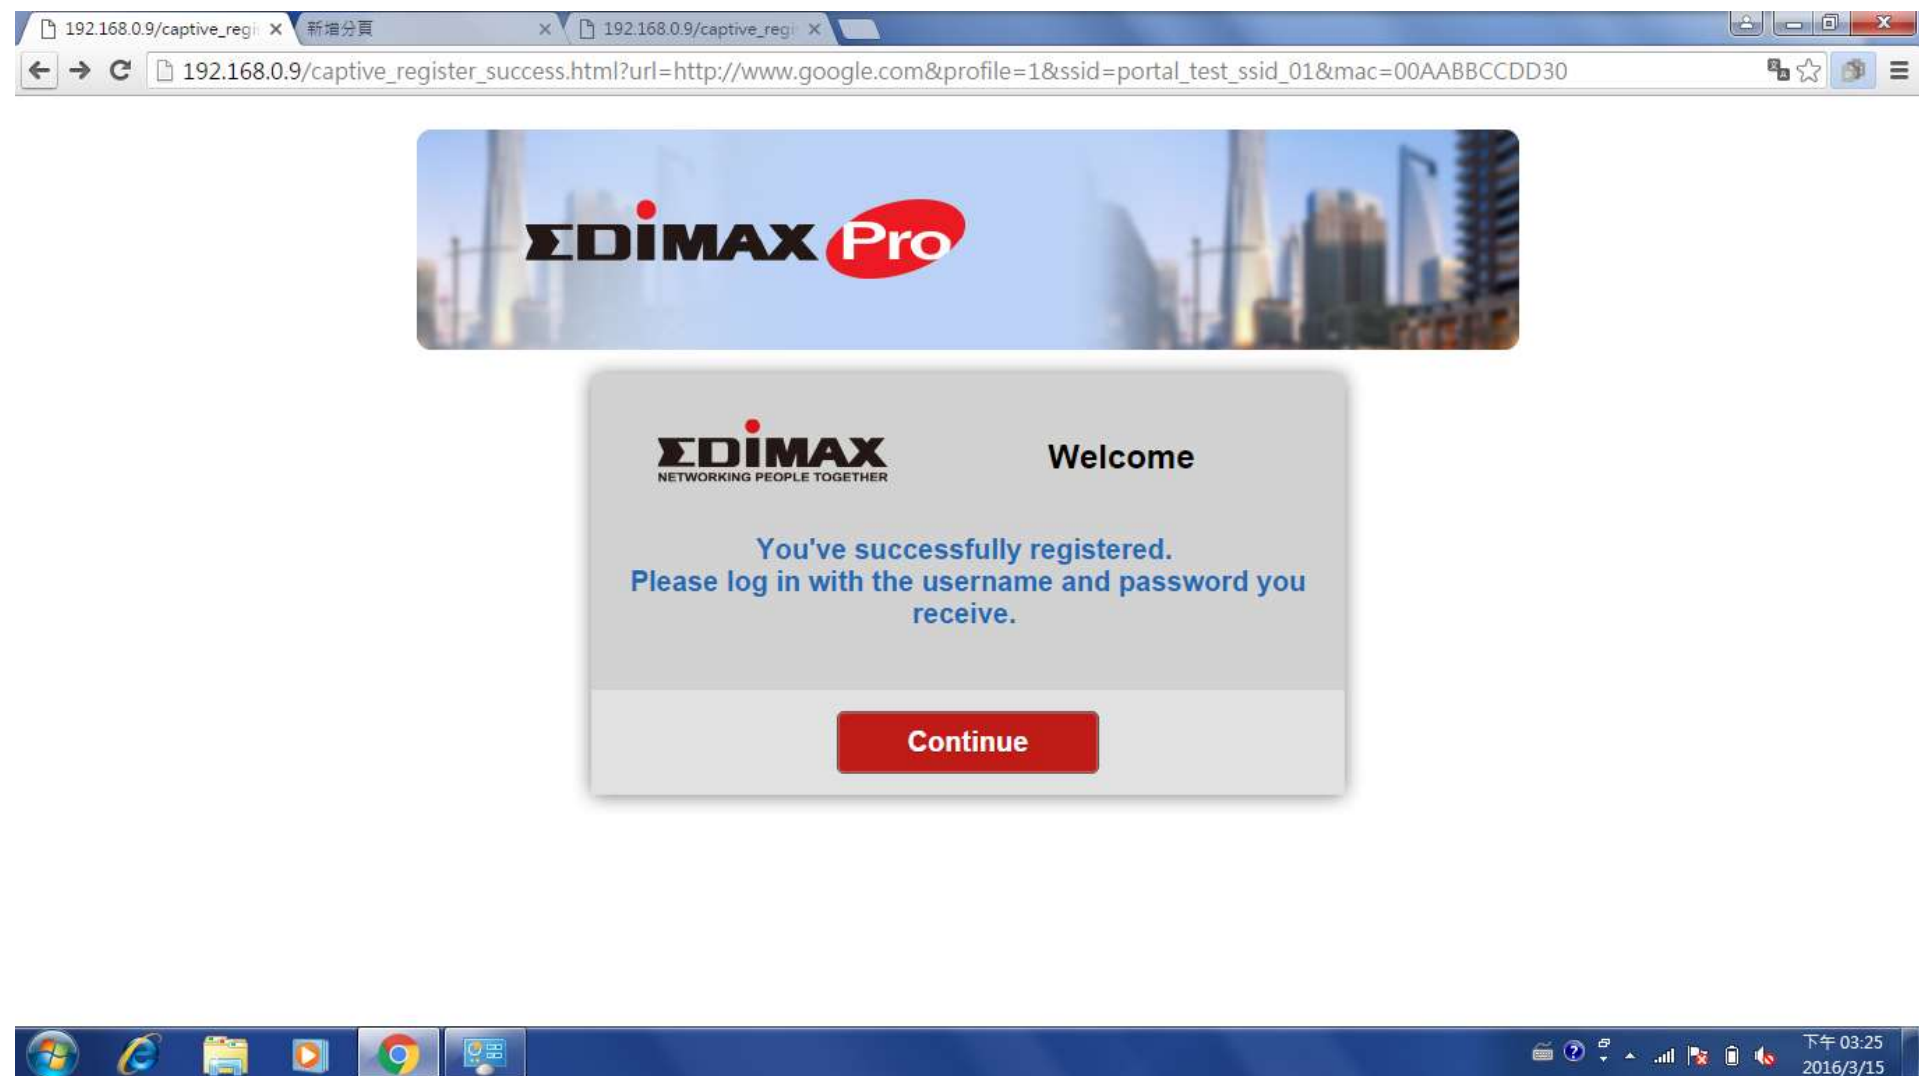

192.168.0.9/captive_regi... 新增分頁

192.168.0.9/captive_regi... 192.168.0.9/captive_register_success.html?url=http://www.google.com&profile=1&ssid=portal_test_ssid_01&mac=00AABBCCDD30

EDIMAX Pro

EDIMAX
NETWORKING PEOPLE TOGETHER

Welcome

You've successfully registered.
Please log in with the username and password you receive.

Continue

下午 03:25
2016/3/15

Cell phone will receive the login message

APC 500 Dashboard Zone Plan NMS Monitor **NMS Settings** Local Network Local Settings Toolbox

- > Access Point
- > WLAN
- > RADIUS
- > Access Control
- > Guest Network
- > Users
- > Guest Portal**
- > Zone Edit
- > Schedule
- > Device Monitoring
- > Firmware Upgrade
- > Advanced
 - System Security
 - Date and Time
 - System Accounts

Definition Table

Symbol	Description
{SSID}	The SSID for Guest Portal user
{USERNAME}	The Name of Guest Portal user
{PASSWORD}	The Password of Guest Portal user
{PERIOD}	The valid access time of Network Service.
{EXPIRETIME}	The expire time of user account
{CREATETIME}	The create time of user account
{SN}	The Serial number of user account

* While printing the user data in Front Desk page, the "Symbol" will be replaced by the value in Users database.

Printout Content

Text with more than 160 letters may be split into different SMS messages.

Welcome! EDIMAX Technology. SSID: {SSID}, Username: {USERNAME}, Password: {PASSWORD}, Valid Period: {PERIOD}, Expire Time: {EXPIRETIME}

Preview Apply Cancel

Edimax

Welcome! EDIMAX Technology.
SSID: portal_test_ssid_01,
Username: 886987058326,
Password: AKQPBRHUEN, Valid
Period: 1 days, Expire Time:
2016/03/16 15:11:14
15:13

Welcome! EDIMAX Technology.
SSID: portal_test_ssid_01,
Username: 886987058326,
Password: BLTGZHCKSR, Valid
Period: 1 days, Expire Time:
2016/03/16 15:47:21
15:47

Welcome! EDIMAX Technology.
SSID: portal_test_ssid_01,
Username: 886987058326,
Password: NXZECTUCLA, Valid
Period: 1 days, Expire Time:
2016/03/16 15:57:16
15:57

Send message

Type in Username(cell phone number) and password

192.168.0.9/captive_login.html?url=http://www.google.com&profile=1&ssid=portal_test_ssid_01&mac=00AABBCCDD30

EDIMAX Pro

EDIMAX NETWORKING PEOPLE TOGETHER **Captive Portal Login**

User Name 886987058326

Password

[Register an account to access Internet](#)


Login

Remember Me

Accept [Terms of use](#)

下午 03:26
2016/3/15



 **EDIMAX**
NETWORKING PEOPLE TOGETHER

Welcome

You've successfully authenticated.

Your guest access is valid until
2016/03/16-15:11:14

[Continue](#)